


**RANGE DIAGRAM**

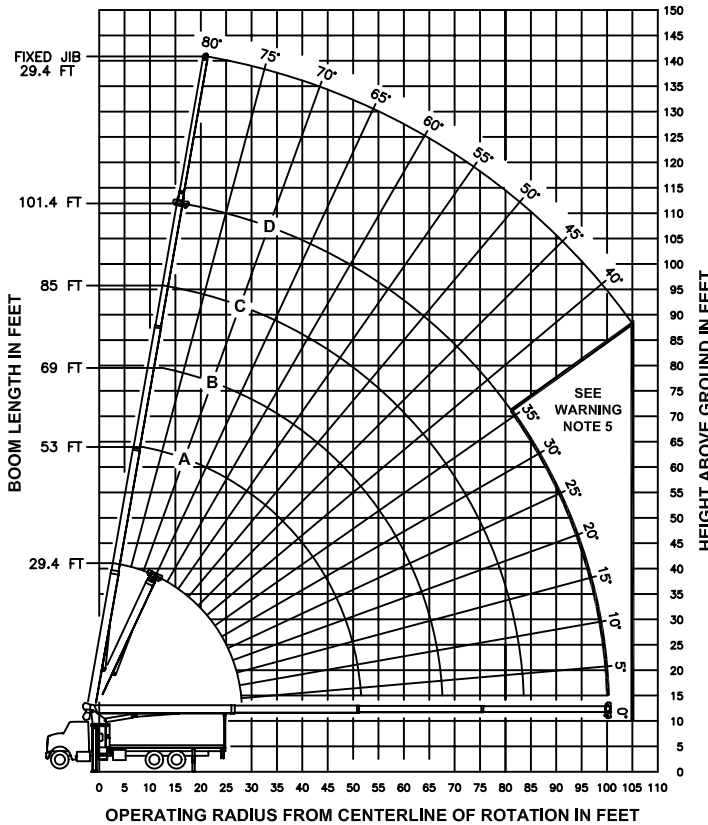

HEIGHT ABOVE GROUND IN FEET

**LOAD RATINGS IN LBS WITH OUTRIGGERS AND STABILIZERS EXTENDED**

**JIB LOAD RATINGS WITH OUTRIGGERS AND STABILIZERS EXTENDED**

HEIGHT ABOVE GROUND IN FEET	LMI CODE #1								LMI CODE #2	
	LOADED BOOM ANGLE		BOOM LENGTH		MARKER		OPERATING RADIUS	BOOM ANGLE	OPERATING RADIUS	BOOM ANGLE
	BASE	1ST	2ND	3RD	BASE	1ST				
	29.44 FT	53 FT	69 FT	85 FT	101.44 FT					29 FT JIB FOR ALL BOOM LENGTHS SEE WARNING NOTE 4
5	80	52000								RATED LOAD IN POUNDS
8	74	37390							8	
10	70	31750							10	
12	66	27740	78	14000					12	
14	61	24720	76	14000	80	14000			14	
17	54	21200	72	14000	78	12880			17	
20	46	18030	69	13700	75	11430	79	8920	20	
25	29	14120	63	11070	71	9460	75	8000	79	6000
30			56	9170	66	8210	72	7070	76	5500
35			49	7850	61	6970	68	6130	73	4980
40			41	6120	56	5980	65	5320	70	4490
45			31	4890	51	5020	61	4640	67	4000
50			17	3950	45	4090	57	4070	64	3580
55					38	3370	52	3440	61	3200
60					30	2790	47	2860	57	2850
65					19	2310	42	2390	54	2430
70							36	1990	50	2040
75							29	1650	45	1700
80							20	1360	41	1420
85									36	1160
90									30	950
95									22	750
100									3	570
105										
	340 LBS.	190 LBS.	150 LBS.	120 LBS.	100 LBS.	DEDUCTIONS FOR STOWED JIB				

**WARNING**

- THE OPERATOR MUST READ AND UNDERSTAND THE OWNER'S MANUAL BEFORE OPERATING THIS CRANE.
- POSITIONING OR OPERATION OF CRANE BEYOND AREAS SHOWN ON THIS CHART IS NOT INTENDED OR APPROVED EXCEPT WHERE SPECIFIED IN OWNER'S MANUAL.
- LOADED BOOM ANGLES AT SPECIFIED BOOM LENGTHS GIVE ONLY AN APPROXIMATION OF THE OPERATING RADIUS. THE BOOM ANGLE BEFORE LOADING SHOULD BE GREATER TO ACCOUNT FOR DEFLECTIONS. DO NOT EXCEED THE OPERATING RADIUS FOR RATED LOADS.
- THE OPERATING RADIUS SHOWN IN THE JIB RATING CHART IS FOR FULLY EXTENDED BOOM ONLY. WHEN BOOM IS NOT FULLY EXTENDED, USE ONLY LOADED BOOM ANGLE TO DETERMINE LOAD RATING OF JIB.
- BOOM MUST BE FULLY RETRACTED WHEN JIB IS ERRECTED, BEFORE LOWERING BOOM THRU THIS AREA.
- FOR BOOM ANGLES NOT SHOWN ON JIB LOAD RATING CHART, USE RATING OF NEXT LOWER BOOM ANGLE.
- FOR BOOM LENGTHS NOT SHOWN, USE RATING OF NEXT LONGER BOOM LENGTH. FOR RADII NOT SHOWN, USE RATING OF NEXT LONGER RADIUS.
- CRANE LOAD RATINGS ON OUTRIGGERS ARE BASED ON FREELY SUSPENDED LOADS WITH THE MACHINE LEVELED AND STANDING ON A FIRM UNIFORM SUPPORTING SURFACE. NO ATTEMPT SHALL BE MADE TO MOVE A LOAD HORIZONTALLY ON THE GROUND IN ANY DIRECTION.
- PRACTICAL WORKING LOADS DEPEND ON SUPPORTING SURFACE, WIND, AND OTHER FACTORS AFFECTING STABILITY SUCH AS HAZARDOUS SURROUNDINGS, EXPERIENCE OF PERSONNEL, AND PROPER HANDLING, ALL OF WHICH MUST BE TAKEN INTO ACCOUNT BY THE OPERATOR.
- THE MAXIMUM LOAD WHICH MAY BE TELESCOPED IS LIMITED BY HYDRAULIC PRESSURE, BOOM ANGLE, AND BOOM LUBRICATION. IT IS SAFE TO ATTEMPT TO TELESCOPE ANY LOAD WITHIN THE LIMITS OF THE LOAD RATING CHART. BOOM MUST BE FULLY RETRACTED AGAINST BOOM STOPS AT ALL TIMES WHEN LIFTING MINIMUM BOOM LENGTH CAPACITY LOADS.

**INFORMATION**

- DEDUCTIONS MUST BE MADE FROM RATED LOADS FOR STOWED JIB, OPTIONAL ATTACHMENTS, HOOKS, AND LOADBLOCKS (SEE DEDUCTION CHART). WEIGHTS OF SLINGS AND ALL OTHER LOAD HANDLING DEVICES SHALL BE CONSIDERED A PART OF THE LOAD.
- CRANE LOAD RATINGS WITH OUTRIGGERS ARE BASED ON OUTRIGGERS AND STABILIZERS EXTENDED AND SET WITH MACHINE LEVELED.
- LOAD RATINGS ABOVE THE HEAVY LINE ARE STRUCTURALLY LIMITED CAPACITIES. LOAD RATINGS BELOW THE HEAVY LINE ARE STABILITY LIMITED CAPACITIES AND DO NOT EXCEED 85% OF TIPPING.

**DEFINITIONS**

- OPERATING RADIUS IS THE HORIZONTAL DISTANCE FROM THE AXIS OF ROTATION TO THE CENTER OF THE VERTICAL HOIST LINE OR TACKLE WITH LOAD APPLIED.
- LOADED BOOM ANGLE AS SHOWN IN THE COLUMN HEADED BY  $\angle$  IS THE INCLUDED ANGLE BETWEEN THE HORIZONTAL AND LONGITUDINAL AXES OF THE BOOM BASE AFTER LIFTING RATED LOAD AT RATED RADIUS.

**LMI OPERATING CODES**

- SETTING CRANE CONFIGURATION**      **SETTING CRANE WITH PERSONNEL LIFTING PLATFORM**
- #1 --- MAIN BOOM
  - #2 --- FIXED JIB
  - #5 --- PERSONNEL LIFTING PLATFORM ON MAIN BOOM
  - #6 --- PERSONNEL LIFTING PLATFORM ON FIXED JIB

**ALLOWABLE LINE PULL**

1 PART LINE	2 PART LINE	3 PART LINE	4 PART LINE	5 PART LINE	6 PART LINE	7 PART LINE
8500 LBS	17000 LBS	25500 LBS	34000 LBS	42500 LBS	51000 LBS	52000 LBS
7400 LBS	14800 LBS	22200 LBS	29600 LBS	37000 LBS	44400 LBS	51800 LBS

**WARNING**

ANTI-TWO-BLOCK SYSTEM MUST BE IN GOOD OPERATING CONDITION BEFORE OPERATING CRANE.

REFER TO THE OWNER'S MANUAL.

KEEP AT LEAST 3 WRAPS OF LOAD LINE ON THE DRUM AT ALL TIMES.

9/16" 6X25 IHRC (3.5:1 SF) - 29750 LBS MIN BREAKING STRENGTH  
9/16" ROT RESISTANT (5.0:1 SF) - 37000 LBS MIN BREAKING STRENGTH

**DEDUCTIONS FROM RATED LOADS FOR LOAD HANDLING DEVICES SUPPLIED BY MANITEX.**

- AUXILIARY BLOCK ----- 50 LBS
- AUXILIARY SHEAVE ----- 50 LBS
- OVERHAUL BALL ----- SEE OVERHAUL BALL MFRGR. NAMEPLATE
- LOAD BLOCK ----- SEE BLOCK MFRGR. NAMEPLATE
- HOSE REEL ----- 140 LBS
- SWING AROUND JIB ----- SEE LOAD CHART


**WARNING**

LIFTING OFF THE MAIN BOOM POINT WHILE THE JIB IS ERRECTED IS NOT INTENDED OR APPROVED.



**MODELS**  
**26101C & 26101T**

CRANE MEETS ANSI B30.5 REQUIREMENTS  
7300088-001 NR



**AREA OF OPERATION**